

PCT

WORLD INTELLECTUAL PROPE
International Bu

INTERNATIONAL APPLICATION PUBLISHED UNDER



(51) International Patent Classification⁶ :

A61B 17/70, 17/80, 17/86

A1

(11) Int

WO 9608206A1

(43) International Publication Date: 21 March 1996 (21.03.96)

(21) International Application Number: PCT/US95/11681

(22) International Filing Date: 14 September 1995 (14.09.95)

(30) Priority Data:

08/306,670

15 September 1994 (15.09.94) US

(71) Applicant: SMITH & NEPHEW RICHARDS INC. [US/US];
1450 Brooks Road, Memphis, TN 38116 (US).

(72) Inventors: FOLEY, Kevin, T.; Suite 600, 930 Madison
Avenue, Memphis, TN 38103-3440 (US). KLARA, Peter,
M.; Suite 1100, 880 Kempsville Road, Norfolk, VA 23502
(US). MAXWELL, Keith; Suite 200, 41 Oakland Avenue,
Asheville, NC 28801 (US). MIDDLETON, Lance; 7350
Royce Cove, Memphis, TN 38125 (US). MORRISON,
Matthew, M.; 7882 Meadow Vale Drive, Memphis, TN
38125-3144 (US).

(74) Agent: DOUGLAS, Earl; Smith & Nephew North America,
Legal Dept., 1450 Brooks Road, Memphis, TN 38116 (US).

(81) Designated States: AT, AU, CA, JP, European patent (AT, BE,
CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT,
SE).

Published


With international search report.

*Before the expiration of the time limit for amending the
claims and to be republished in the event of the receipt of
amendments.*

(54) Title: OSTEOSYNTHESIS APPARATUS

(57) Abstract

A bone fixation apparatus (10) having an elongated plate member (12) with at least two pairs of circular openings (24, 26) and at least one elongated slot (28) positioned along the longitudinal axis of the plate member (12). The plate member (12) is formed so as to include a curve in the transverse plane (TP). The openings and slot each form a cavity with walls extending between the upper and lower plate member surfaces (16, 18) with smaller diameter wall portions (32) at the plate member upper and lower surfaces and a larger diameter wall portion (34) therebetween. The openings (24, 26) and slot (28) are shaped to allow for angulation of an implanted bone screw (14). A plurality of bone screws (14) have a threaded first end portion (36) adapted for implantation into a patient's bone mass and a spherically shaped enlarged second end portion (40). A locking member (48) connects to the second end portion (40) to grip the cavity wall of the plate member (12) so as to lock each bone screw (14) into a selected position within the openings (24, 26) and slot (28) of the plate member (12).

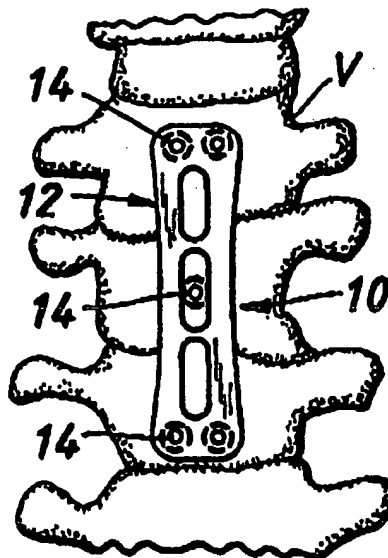

BEST AVAILABLE COPY

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

OSTEOSYNTHESIS APPARATUS

The present invention relates to an improved bone or spinal fixation apparatus in the form of an elongated plate member and a locking bone screw. The apparatus has particular utility in anterior cervical spine fixation by providing a plate that allows for angulation of the bone screws and a locking bone screw that secures the bone screws into the plate member at a selected angle corresponding to a thick region of the bone mass.

10

There are a number of surgical procedures which require fixation of portions of the spine with respect to one another. Typically, bone screws are employed in the fixation of the spine where the implantation of the bone screws is a surgical procedure in which one or more surgical openings are formed in adjacent portions of the spine and threaded bone screws are implanted into the surgical openings. Connective structures such as rods or plates extend between the various spine members and are connected to the spine members by the implanted bone screws.

20

In the treatment of spinal disorders and spinal fractures, both a posterior and an anterior approach is used and the use of plating systems for posterior internal fixation of the spine is well known. Several plating systems have also been developed for anterior internal fixation of the spine. For example, the Syracuse I-plate provides a number of differently-sized I-shaped plates which are engaged across the vertebrae. A contoured anterior spinal fixation plate is known which includes a number of screw openings through the contoured plate. The number of openings simply provide different locations for engaging a bone screw to the vertebrae, and does not allow for angulation of the bone screws. A further problem with the application of a spinal fixation system is the placement of

30

such a system in the cervical region where anatomical fit and the lack of bone mass is a problem.

Even with these known posterior and anterior plate fixation systems, there remains a need for a plate and screw system that allows for variation in screw placement along the longitudinal axis of the plate as well as providing for angulation in both the medial-lateral and the cephalad-caudal plane. There is also a need for a fixation system that provides a locking bone screw mechanism for securely fastening the bone screw in the angled position within the plate. There is further a need for a fixation plate that is curved to fit the contours of the vertebrae and is also somewhat bendable during implantation but rigid enough to allow fusion to take place after implantation.

It is thus an object of the present invention to provide a bone fixation system that offers a strong and stable construct for maximum fusion augmentation of any bone structure and yet is versatile enough for any patient and is easy to use.

According to the present invention a bone fixation apparatus comprises a plate member having a longitudinal axis, upper and lower surfaces, opposed longitudinal side edges, at least two pairs of circular openings and at least one elongated slot positioned along the longitudinal axis of the plate member, said openings and slot each forming a cavity extending between the upper and lower plate member surfaces wherein at least some of said cavities are narrower at the plate member upper and lower surfaces than at a plane located between said surfaces, said openings and slot being shaped to allow for transverse and longitudinal angulation of an implanted bone screw; a plurality of bone screws each having a threaded first end portion adapted for implantation into a patient's

3

bone mass and an enlarged second end portion; and locking means associated with the second end portion of each bone screw for expanding the second end portion to grip a cavity wall of the plate member and for locking each bone screw into a selected position within at least some of the openings and/or slot of the plate member.

The present invention provides an apparatus that can be made small enough for anterior cervical spine applications and is preferably of a size which is suitable to be placed on adjoining vertebrae, the desired size being selected to suit the particular intended application of the apparatus. The plate is preferably curved in the transverse plane.

The distance between the opposed longitudinal side edges is preferably less in the central region of the plate member than in the end regions of the plate so that, for example, the edges are of concave appearance. The upper and/or lower surfaces edges of the openings and slot may advantageously be bevelled.

The bone screw has an enlarged second end which is shaped preferably to allow engagement between that end of the screw and the side walls of a cavity in a bone fixation plate member upon operation of the locking means. A particularly suitable screw has an enlarged second end which is spherically shaped or part-spherical. The locking means preferably is adapted to cause an interference fit between the enlarged second end of the screw and the walls of a cavity and preferably comprises a locking member which is of a size and shape to fit into a bore located in the second end of the bone screw. In a preferred embodiment the second end has a central bore which has threads and at least two radial slits which intersect the bore. In this form the locking means may comprise a threaded

locking member which may be screwed into the central bore thereby to expand the second end portion at the radial slits.

According to the invention a plate member which is adapted for use in a bone fixation apparatus has upper and lower surfaces, a longitudinal axis, opposed longitudinal side edges, two pairs of circular openings and at least one elongated slot positioned along the longitudinal axis of the plate member, said openings and slot each forming a cavity extending between the upper and lower plate member surfaces wherein at least some of said cavities are narrower at the plate member upper and lower surfaces than at a plate located between said surfaces, said openings and slot being shaped to allow for transverse and longitudinal angulation of an implanted bone screw.

According to the invention, a bone screw capable of being locked into a selected position in a plate member comprises a threaded first end portion, a bone screw capable of being locked into a selected position in a plate member, comprising a threaded first end portion adapted for implantation into a patient's bone mass and an enlarged second end portion; and locking means associated with the second end portion of the bone screw for expanding the second end portion to grip portions of a wall surface of an opening in a plate member and for locking the bone screw into a selected position within said opening of a plate member.

For a further understanding of the nature and objects of the present invention, reference should be made to the following detailed description, which is given only as an example of the invention, taken in conjunction with the accompanying drawings, in which like parts are given like reference numbers, wherein:

bone screw 14, the upper walls 43 expand outwardly further enlarging the upper portion 40.

As shown in FIGS. 10-12, the angular shape of the cavity walls 31 allows for both transverse and longitudinal angulation of an implanted bone screw 14. The spherically-shaped surface 41 allows the upper portion 40 of the bone screw 14 to be freely rotatable within the plate member cavity 30 prior to insertion of the locking member 48. After the bone screws 14 have been positioned within the openings 24, 26 and slots 28 of the plate member 12 and implanted in the vertebrae of a patient, the locking members 48 are threaded into the tapered central bore 42 of the bone screws 14. The threading 54 of the locking member 48 engages the threading 46 of the central bore 42 and the radial slits 44 allow the upper wall portions 43 to expand outwardly as the locking member 48 is tightened into the central bore 42 (FIG. 9).

The expanding wall portions 43 grip the cavity walls 31 so as to lock each bone screw 14 into a selected position within the openings 24, 26 and slots 28 of the plate member 12 as illustrated in FIGS. 11 and 12. The locking mechanism between the plate member 12 and the bone screws 14 prevents the implanted bone screws from backing out of the vertebrae. This locking mechanism, plus the geometry of the plate member 12 allows the bone fixation apparatus 10 to provide a rigid construct when initially implanted. However, as the implanted bone screws loosen over time, the bone fixation apparatus 10 becomes semi-rigid and provides a construct that is somewhat flexible and compliant. During implantation, the configuration of the openings 24, 26 provides secure fixation at the ends of the plate member 12 while the slots 28 provide for a variation in screw placement along the longitudinal axis of the plate member 12. The bone fixation apparatus 10 can be sized to be

10

used on cervical or lumbar vertebrae in either an anterior or posterior location. The bone fixation apparatus 10 can also be sized to be used on other bone surfaces in addition to vertebrae.

5 Although the present invention has been described with reference to its preferred embodiments, those skilled in the art will recognize changes which may be made in form or structure which do not part from the spirit of the invention already described in the specification and embodied in the claims which follow.

10

CLAIMS

1. A bone fixation apparatus, comprising:
 - a) a plate member having a longitudinal axis, upper and lower
5 surfaces, opposed longitudinal side edges, at least two pairs of
circular openings and at least one elongated slot positioned along
the longitudinal axis of the plate member;
b) said openings and slot each forming a cavity extending
between the upper and lower plate member surfaces wherein at
10 least some of said cavities are narrower at the plate member upper
and lower surfaces than at a plane located between said surfaces,
said openings and slot being shaped to allow for transverse and
longitudinal angulation of an implanted bone screw;
c) a plurality of bone screws each having a threaded first end
15 portion adapted for implantation into a patient's bone mass and an
enlarged second end portion; and
d) locking means associated with the second end portion of
each bone screw for expanding the second end portion to grip a
cavity wall of the plate member and for locking each bone screw into
20 a selected position within at least some of the openings and/or slot
of the plate member.
2. An apparatus as claimed in claim 1, wherein said enlarged
second end portion of said bone screws is spherically or part-
25 spherically shaped.
3. An apparatus as claimed in either claim 1 or claim 2, wherein
said locking means is adapted to form an interference fit between
said second end of said bone screw and a cavity wall of a slot or
30 opening.

12

4. An apparatus as claimed in any of the preceding claims,
wherein the second end portion of each bone screw has a tapered
central bore and at least two radial slits intersecting the bore, said
central bore including threading on a portion of a surface of the
5 bore.

5. The apparatus of claim 4, wherein each bone screw has four
radial slits intersecting the bore.

10 6. An apparatus as claimed in claim 4, wherein the locking means
is sized and shaped to fit into the central bore of each bone screw
and has threading on a portion of its surface for engaging the
threading on the surface of the bore.

15 7. An apparatus as claimed in any of the preceding claims,
wherein said plate member has a transverse plane and is formed so
as to include a curve in the transverse plane.

8. An apparatus as claimed in any of the preceding claims,
20 wherein the plate member further includes a plurality of elongated
slots positioned along the longitudinal axis of the plate member.

9. An apparatus as claimed in any of the preceding claims,
wherein the plate member has a first end, a second end and a
25 center portion and the distance between said opposed longitudinal
side edges is smaller in the region of the center portion than in the
region of the first and second ends.

10. An apparatus as claimed in any of the preceding claims,
30 wherein one pair of circular openings is positioned near a first end
of the plate member and a second pair of circular openings is
positioned near a second end of the plate member.

11. An apparatus as claimed in any of the preceding claims,
wherein the openings and slot(s) allow for transverse angulation of
said bone screw of up to about 35° in each direction from the central
5 vertical axis of the openings and slot.

12. An apparatus as claimed in any of the preceding claims,
wherein the openings allow for longitudinal angulation of up to about
35° in each direction from the central vertical axis of the openings.
10

13. An apparatus as claimed in any of the preceding claims,
wherein the slot(s) allow(s) for longitudinal angulation from about 0°
to 130° from the central vertical axis of the slot.

14. An apparatus as claimed in any of the preceding claims,
wherein the openings and slot include a bevelled surface on at least
one of the upper and lower surfaces of the plate member.
15

15. An apparatus as claimed in any of the preceding claims,
wherein the plate member is of a suitable size to be placed on
adjoining cervical vertebrae.
20

16. An apparatus as claimed in any of the preceding claims,
wherein the plate member is of a suitable size to be placed on
adjoining lumbar vertebrae.
25

17. An apparatus as claimed in any of the preceding claims,
wherein the plate member is of a suitable size to be placed on an
anterior side of the cervical vertebrae.
30

18. A plate member, adapted for use in a bone fixation apparatus,
having upper and lower surfaces, a longitudinal axis, opposed

14

longitudinal side edges, two pairs of circular openings and at least one elongated slot positioned along the longitudinal axis of the plate member;

- 5 b) said openings and slot each forming a cavity extending between the upper and lower plate member surfaces wherein at least some of said cavities are narrower at the plate member upper and lower surfaces than at a plate located between said surfaces, said openings and slot being shaped to allow for transverse and longitudinal angulation of an implanted bone screw.

10

19. A plate member as claimed in claim 18, having a transverse plane and being formed so as to include a curve in the transverse plane.

- 15 20. A plate member as claimed in either claim 18 or claim 19, wherein the plate member includes a plurality of elongated slots positioned along the longitudinal axis of the plate member.

- 20 21. A plate member as claimed in any of claims 18 - 20, wherein the plate member has a first end, a second end and a center portion and the distance between said opposed side edges is smaller in the region of the center portion than in the region of the first and second ends.

- 25 22. A plate member as claimed in any of claims 18-21, wherein one pair of circular openings is positioned near a first end of the plate member and a second pair of circular openings is positioned near the second end of the plate member.

- 30 23. A plate member as claimed in any of claims 18 - 22, wherein the openings and slot(s) allow for transverse angulation of said

15

bone screw of up to about 35° in each direction from the central vertical axis of the openings and slot.

24. A plate member as claimed in any of claims 18 - 23, wherein
5 the openings allow for longitudinal angulation of up to about 35° in each direction from the central vertical axis of the openings.

25. A plate member as claimed in any of claims 18 - 24, wherein
10 the slot(s) allow(s) for longitudinal angulation from about 0° to 130° from the central vertical axis of the slots.

26. A plate member as claimed in any of claims 18 - 25, wherein
the openings and slot(s) include a bevelled surface on at least one
of the upper and lower surfaces of the plate member.

15

27. A bone screw capable of being locked into a selected position
in a plate member, comprising:

a) a threaded first end portion adapted for implantation into a
patient's bone mass and an enlarged second end portion; and

20 b) locking means associated with the second end portion of the
bone screw for expanding the second end portion to grip portions of
a wall surface of an opening in a plate member and for locking the
bone screw into a selected position within said opening of a plate
member.

25

28. A bone screw as claimed in claim 27, wherein said second
end portion is spherical or part-spherical.

29. A bone screw as claimed in either claim 27 or claim 28,
30 wherein said locking means is adapted to form an interference fit
between said second end of said bone screw and a cavity wall of an
opening or slot formed in a plate member.

30. A bone screw as claimed in any of claims 27 - 29, wherein the second end portion has a tapered central bore and at least two radial slits intersecting the bore, said central bore including
5 threading on a portion of a surface of the bore.

31. A bone screw as claimed in claim 30 having four radial slits intersecting the bore.

10 32. A bone screw as claimed in either claim 30 or claim 31, wherein the locking means is sized and shaped to fit into the central bore of each bone screw and has threading on a portion of the screw's surface for engaging the threading on the surface of the bore.

1/3

FIG. 2.

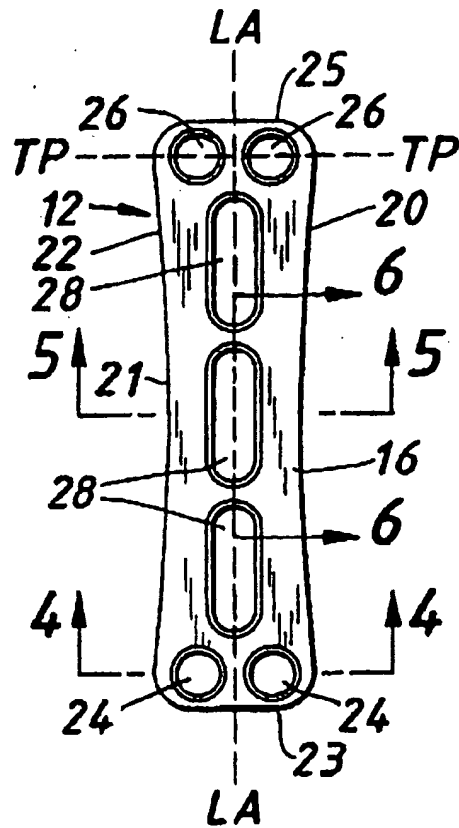
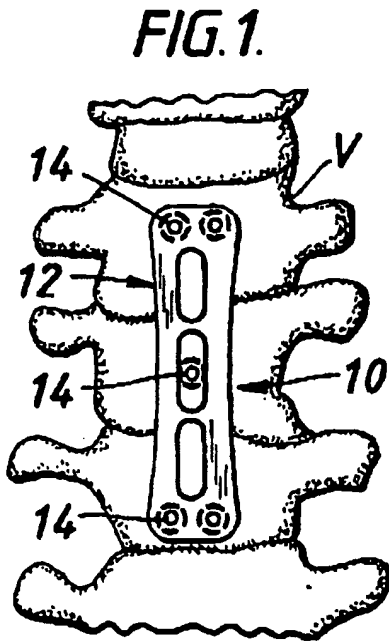


FIG. 3.








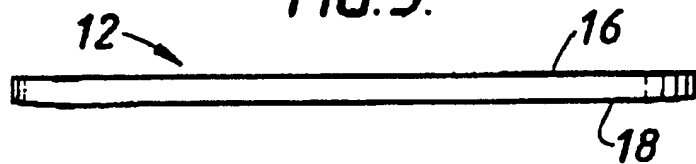


FIG. 4.

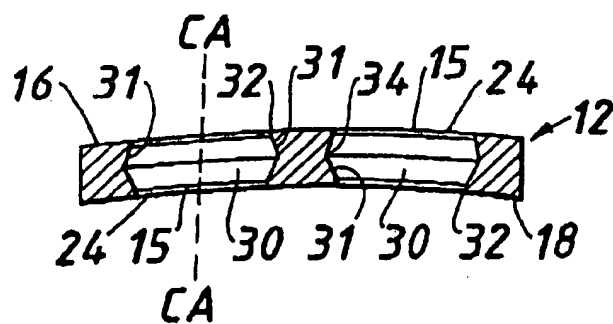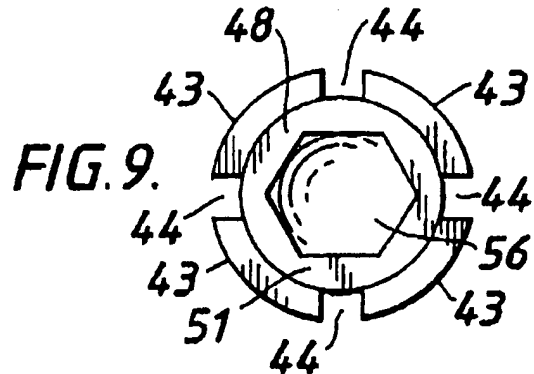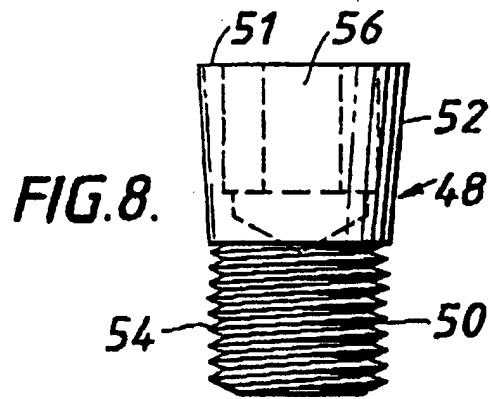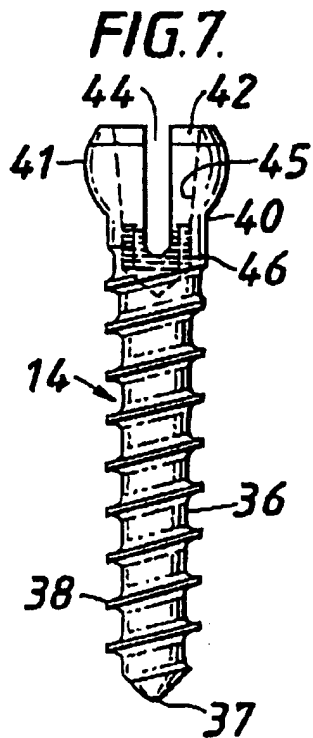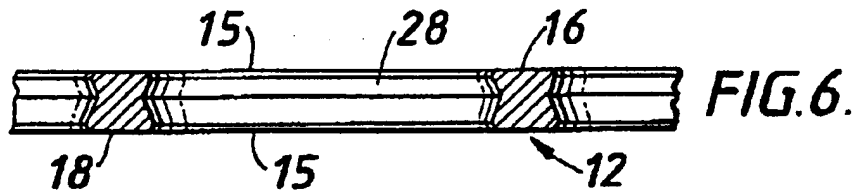

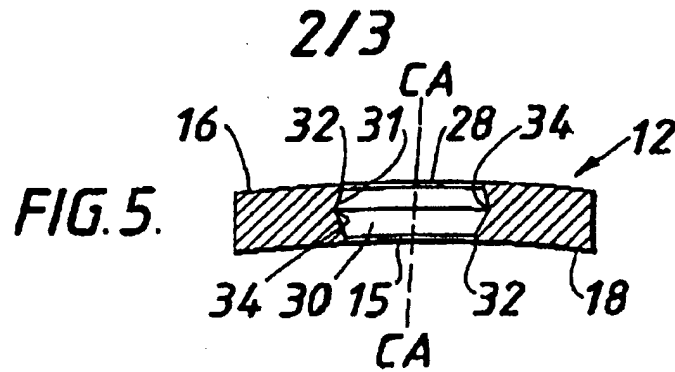

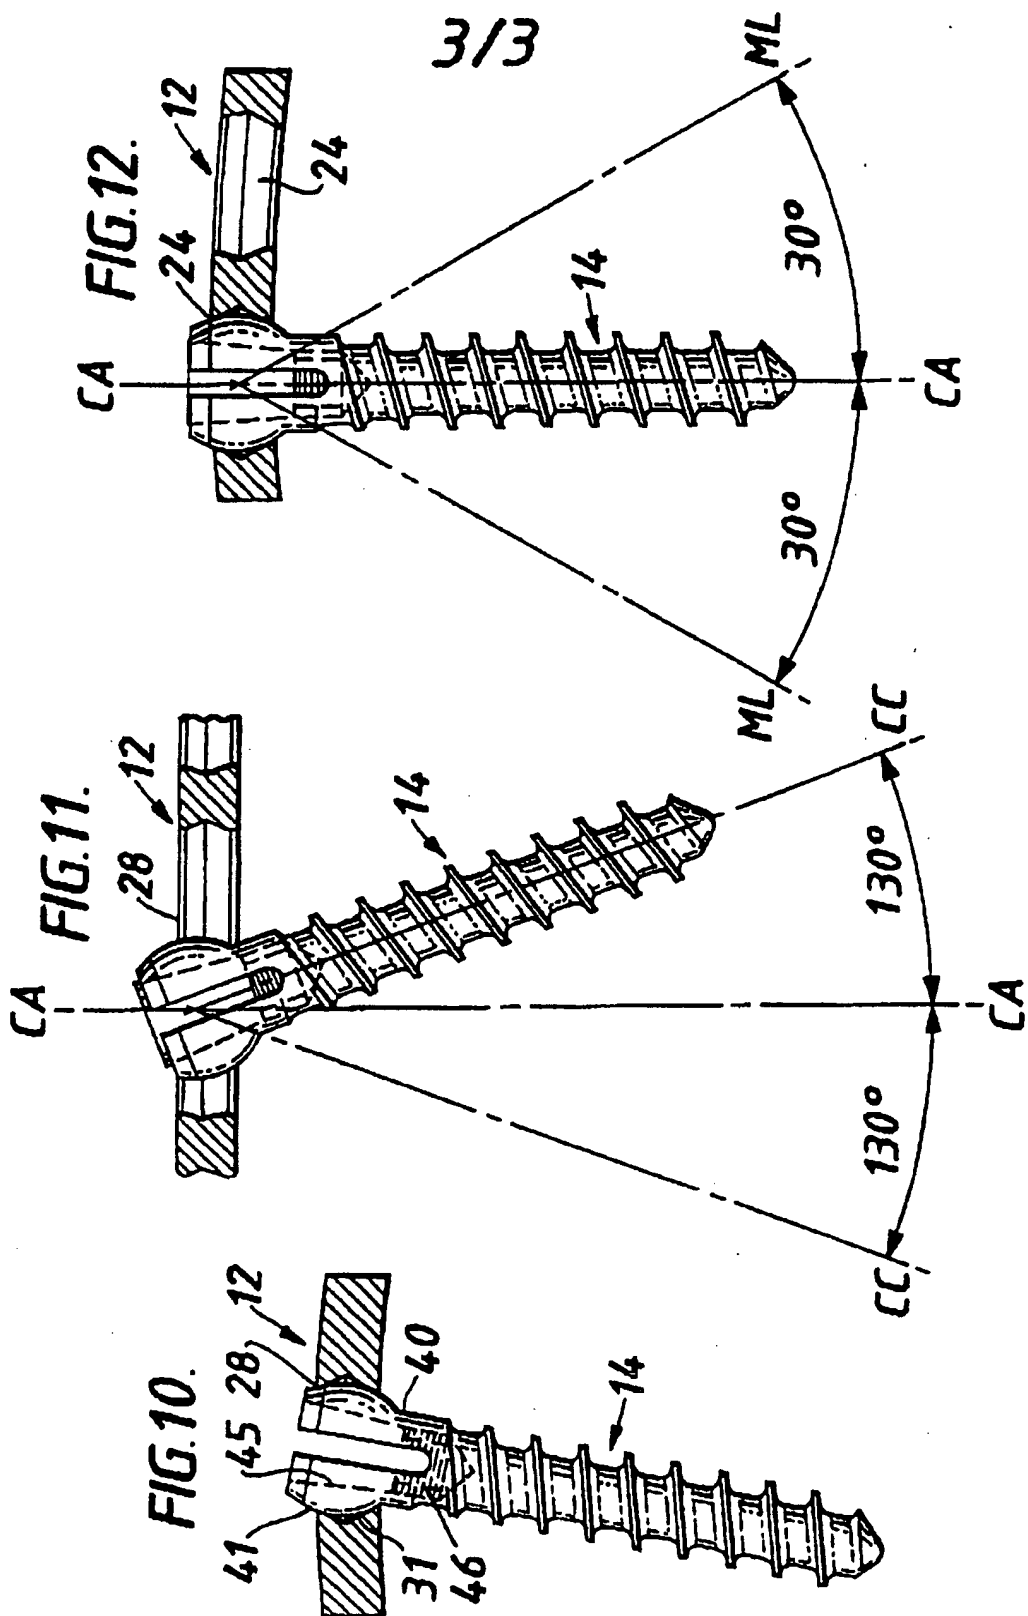

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US95/11681

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) : A61B 17/70, 80, 86

US CL : 606/61, 69, 73

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 606/61, 69-71, 73

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
NONEElectronic data base consulted during the international search (name of data base and, where practicable, search terms used)
NONE**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US, A, 4,484,570 (SUTTER ET AL.) 27 November 1984, see entire document.	27-29
Y	WO, A, 88/03781 (RAVEH) 02 June 1988, see entire document.	1-3, 18-20
Y, P	US, A, 5,364,399 (LOWERY ET AL.) 15 November 1994. see entire document	1-3, 18-20
A	US, A, 5,324,290 (ZDEBLICK ET AL.) 28 June 1994.	1-32



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
A document defining the general state of the art which is not considered to be part of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
E earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*G* document member of the same patent family
O document referring to an oral disclosure, use, exhibition or other means	
P document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

04 DECEMBER 1995

Date of mailing of the international search report

17 JAN 1996

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Authorized officer

TAMARA L. GRAYSAY

Facsimile No. (703) 305-3230

Telephone No. (703) 308-0858

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US95/11681

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This international report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☒ Claims Nos.: 4-17, 21-26, 30-32
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

☐
☐

The additional search fees were accompanied by the applicant's protest.

No protest accompanied the payment of additional search fees.

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.